

EZ TPO PEEL & STICK™

Advanced Adhesion Technology

GENFLEX™
Roofing Systems
Above all.



ADVANCED ADHESION TECHNOLOGY

Until now, if you wanted to use self-adhered membranes you needed to trade some degree of performance for convenience. Especially if you ever wanted to roof at 50 °F or less. That trade-off ends with GenFlex **EZ TPO Peel & Stick** with advanced adhesion technology.

Now you can have extreme performance, even down to 20 °F, with self-adhesive technology that blows away competitive membranes. All while enjoying the convenience of no chemicals, buckets, mixing or waiting.




WHY YOU SHOULD INSTALL

COLD & HOT WEATHER PERFORMANCE

TACK TEST GENFLEX vs. COMPETITORS

Loss/gain in Adhesiveness vs. Performance @ 60 degrees F

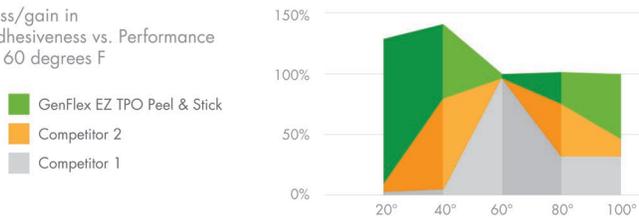

- Significantly expand your installation window by installing GenFlex EZ TPO Peel & Stick, even down to 20 °F with outstanding adhesion.

ADHESIVE STRENGTH

ADHESIVE STRENGTH

Peel Test - Max Load (lbf/in)



- GenFlex EZ TPO Peel & Stick is twice as strong* as the nearest self-adhered membrane competitor.
- No primer needed to install on all common roofing substrates.

(*Under specific laboratory conditions)

INSTALLATION SPEED

	GENFLEX EZ TPO PEEL & STICK	STANDARD BONDING ADHESIVE	LVOC BONDING ADHESIVE
90°	0	9	14
70°	0	17	19
50°	0	19	24
30°	0	20	27

- With zero flash off time, and without the need to mix and apply adhesives, GenFlex EZ TPO Peel & Stick installs from two to five times faster than standard, fully adhered systems (depending on ambient conditions).

SPECIFICATIONS

- Standard thickness: 60 mil (1.52 mm)
- Standard widths: 5' (1.5m) and 10' (3 m)
- Standard length: 100' (30.5 m)
- Color: White
- Seams: Heat Weld
- Flash-off Time: None
- VOCs: None
- Odors: None



ACCESSORIES

ADVANCED ADHESION TECHNOLOGY

GenFlex advanced adhesion technology brings superior performance to our entire line of TPO Peel & Stick accessories.

Peel & Stick™ TPO Flashing Membrane

- ▼ Pre-applied pressure-sensitive adhesive
- ▼ Pre-cut flashing sizes for less set-up time
- ▼ 18 3/4" width (476 mm) x 100' length (30.5 m)

Peel & Stick™ Seam Tape

- ▼ Two-sided, cured butyl seam tape (White)
- ▼ One-step clean-and-prime application with scrub pad and handle
- ▼ Excellent adhesion to TPO membranes
- ▼ 3" width (76.2 mm) x 100' length (30.5 m) rolls

Peel & Stick™ Pipe Boots

- ▼ Injection-molded TPO boot with pre-applied butyl tape
- ▼ Fast and easy installation with GenFlex clear primer
- ▼ Fits openings from 1" - 6" (25.4 mm - 152.4 mm)

Peel & Stick™ Cover Tape

- ▼ 5" (127 mm) wide TPO membrane flashing with pre-applied butyl tape
- ▼ Fast and easy way to strip in metal edge
- ▼ Can also be used to patch holes or punctures in membrane

Peel & Stick™ Yellow Safety Strip

- ▼ 30 mil (0.76 mm) yellow TPO membrane laminated to a white, cured seam tape
- ▼ 5.5" wide (140 mm) x 100' long (30 m)
- ▼ Easy to install, long-lasting option for identifying hazards on the roof

Walkway Pad

- ▼ 30" wide (140 mm) x 50' long (15 m)
- ▼ Highly reflective white textured surface for visibility and increased slip resistance
- ▼ Smooth bottom for easy welding and installation
- ▼ Scrim reinforcement for dimensional stability and increased durability



Visit www.genflex.com/PeelAndStick for more information or contact your sales representative for a demonstration.

